


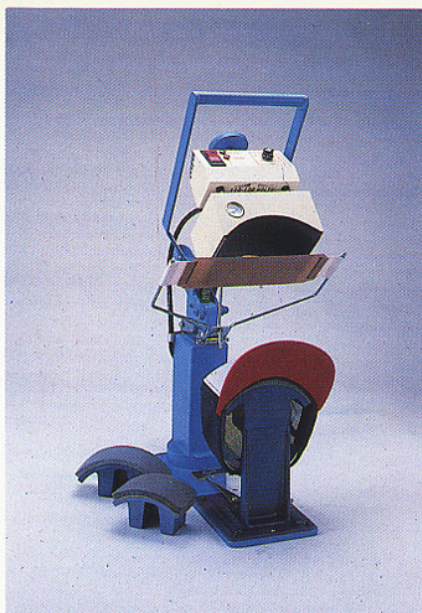


178 CAP SEALER

- Plug-In Universal Console™
- 4x7 Teflon coated heat platen with cast-in heat unit
- Interchangeable bottom forms: 4x7, 3x5, 2½x7, with silicone rubber pads (one included)
- Adjustable pedestal for perfect alignment, every time
- Unique pressure linkage system dampens resistance on wrap-around handle
- Self-lubricating oilite bushings for maintenance-free operation
- Adjustable pressure screw & knob assembly
- Spring pressure release lever action
- Teflon transfer hold-down device (removable)
- Adjustable spring steel cap stretcher
- Available with needleface heat platen (178KN-HB)
- Heat platen & base can interchange with 374H Models

MACHINE SPECS: 19"D x 7½"W x 29"H — 35 lbs.

ELECTRICAL SPECS: 120V, 320W, 2.7 Amps
240V available on special order.

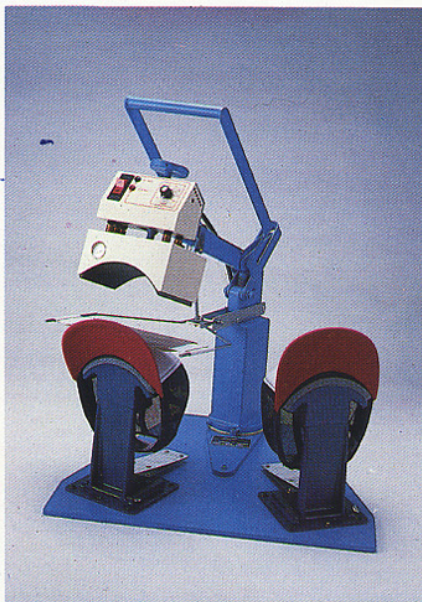


178T TWIN CAP SEALER

- Plug-In Universal Console™
- 4x7 Teflon coated heat platen with cast-in heat unit
- Interchangeable bottom forms: 4x7, 3x5, 2½x7, with silicone rubber pads (one included)
- Adjustable pedestal for perfect alignment, every time
- Unique pressure linkage system dampens resistance on wrap-around handle
- Self-lubricating oilite bushings for maintenance-free operation
- Adjustable pressure screw & knob assembly
- Spring pressure release lever action
- Teflon transfer hold-down device (removable)
- Adjustable spring steel cap stretcher
- Available with needleface heat platen (178KN-HB)
- Heat platen & base can interchange with 374H Models
- Twin working stations for high production printing
- Unique ball bearing system for smooth, dependable pivoting
- Heat platen pivots side to side

MACHINE SPECS: 23"D x 21"W x 28"H — 65 lbs.

ELECTRICAL SPECS: 120V, 320W, 2.7 Amps
240V available on special order.

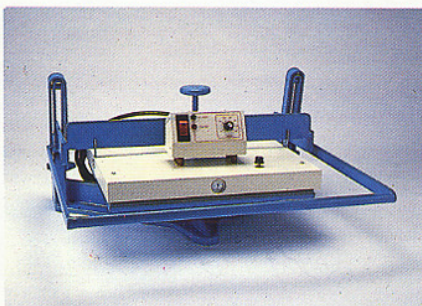

674 SEALOMATIC

- Plug-In Universal Console™
- All around work horse ideal for shirt printers
- 14x16 Teflon coated platen with cast-in heat unit
- Silicone rubber pad raised work area provides drape space
- Unique pressure linkage system dampens resistance on wrap-around handle
- Self-lubricating oilite bushings for maintenance-free operation
- Adjustable pressure screw & knob assembly
- Spring pressure release lever action
- Heat platen lifts completely back over center for total access to printing area without fear of burning operator
- Twin linkage system gives up to 2500 lbs of platen pressure cutting application time on many transfers
- Surprisingly easy to operate because of unique lever & spring release

MACHINE SPECS: 26"D x 23"W x 24"H — 65 lbs.

ELECTRICAL SPECS: 120V, 1500W, 12.5 Amps
240V available on special order.